



PCW-400

Outdoor Small Cell

Where 5G
Meets Wi-Fi



Outdoor Integrated Enterprise 5G & Wi-Fi Small Cell

The PCW-400 Wi-Fi enabled 5G outdoor small cell is extremely versatile in its usage and can be deployed in multiple scenarios. Operating as a fully integrated small cell, the PCW-400 offers unprecedented data capacity and user QoE. This outdoor unit can easily be mounted on lamp posts or buildings for 180° coverage or install two units back-to-back for a comprehensive 360° coverage.

This 5G NR small cell operates in n48, n77 and n78 bands*, in addition to the three bands from Wi-Fi 7 standard. Uniquely designed to support simultaneous 5G and Wi-Fi connectivity, the PCW-400 can support up to 128 users at the same time, providing frequency redundancy and interference mitigation. Due to these specs, this product will be ideal for providing 5G coverage extension in any Operator's network, as part of a Neutral Host Network, or in any Private Network deployment scenario.

Managed by BLiNQ's Management Suite, the PCW-400 can interface with any third-party SMO (Service Management & Orchestration) based on standard O1 (O-RAN) management interfaces.

For CBRS band networks, the PCW-400 implements both n48 connectivity options - a stand-alone CBSD agent, as well as connectivity to a SAS PROXY embedded in the NetLiNQ SON Controller.

BLiNQ's PCW-400 is an extraordinary outdoor small cell that can take your network to the next level.

**Other bands available by request*



O-RAN Integrated Small Cell



**5G NR Dual 2T2R,
200 MHz OBW/IBW**



**Max. Throughput: 6 Gbps
Of Aggregated 5G & Wi-Fi**



2T2R Triband, Wi-Fi 6E/7 AP



**Zero-Touch Provisioning
(Automatic Onboarding)**

PCW-400

Overview




Additional ordering options:

- **5G NR Only (No Wi-Fi)**
For lower cost
- **Premium Connectivity**
For 200 MHz OBW and up to 128 UEs

Other features and benefits:

- Supports 5G bands n48, n77 and n78
This covers 3550–3700 MHz (CBRS), 3300–4200 MHz and 3300–3800 MHz respectively.
- Supports O-RAN O1 Interface
- 180° Coverage
Install 2 units back-to-back for a 360° coverage
- Integrated Antenna
Hassle-free, simple deployment
- Supports Carrier Aggregation
Up to 4 CC
- Supports All 5G FR1 TDD Configurations
- Supports VoNR
- Supports GPS, 1588v2 and SyncE
- Supports Mobility

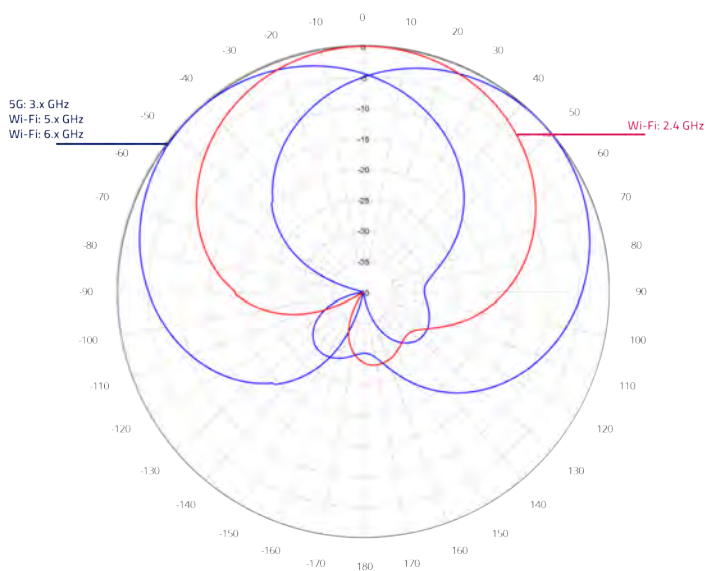

PCW-400

Specifications



RADIO SPECIFICATIONS	
3GPP Compliance	3GPP Rel. 16
5G Frequency Bands	3.3–4.2 GHz (n48/n77/n78)
5G RF	Two 2x2 MIMO 90° Beams (180° Coverage)
5G Max. Tx Power Per Port / Aggregate (2x2)	23 / 26 dBm
5G Antenna Peak Gain	10 dBi
5G IBW/OBW	200/100 MHz (200/200 MHz Optional)
5G Channel BW	10, 20, 30, 40, 60, 100 MHz
Wi-Fi Standard / Frequency Bands	Wi-Fi 7 (802.11be) / 2.4 GHz, 5.x GHz, 6.x GHz
Wi-Fi 5.x and 6.x GHz RF	Two 2x2 90° Beams (180° Coverage)
Wi-Fi 2.4 GHz RF	2x2 90° Beam (90° Coverage)
Wi-Fi Max. Tx Power Per Port / Aggregate (2x2)	23 / 26 dBm
Wi-Fi Antenna Peak Gain	10 dBi (For all Bands)
Wi-Fi Channel BW	Up to 320 MHz
Wi-Fi Mesh	Easy Mesh, Multi-Link
PERFORMANCE & ATTRIBUTES	
No. of UEs Supported	Up to 64 (128 Optional)
5G NR Radio Standard Support / Quality of Service	5G NR / 3GPP Compliance
5G NR Duplex Mode	TDD
Frame Structure	DDDSUUDDDD (5ms), DDSSUUDDDD, DDSSUUUDD (5ms), DDDSU (2.5ms)
5G Number of Component Carriers (CC)	Up to 4CC
Max. Modulation	DL: 256 QAM / UL: 256 QAM
Aggregated Throughput	Wi-Fi: 4 Gbps 5G NR: 2.4 Gbps
Power Consumption	70 W
Synchronization	GPS, 1588v2 and SyncE
5G Citizens Broadband Radio Service (CBRS)	CBSD Cat. B
Wi-Fi Automated Frequency Coordination (AFC) Support	Standard Power

PCW-400

Specifications



ELECTRICAL & INTERFACES	
Physical Interfaces	10G Ethernet with PoE & 10G SFP+
Power	PoE (IEEE 802.3bt)
SOFTWARE	
Management Protocols	O-RAN based (NETCONF, WebSocket, REST/HTTPS), TR-069 (Customer Driven)
Networking	IPv4, IPv6, IPsec, WireGuard, VLANs, MOCN
Core Connectivity	5G Standalone (SA)
Wi-Fi Security	WPA3-Enterprise, Passpoint/Hotspot 2.0
Encryption	AES, CCMP, TKIP
Configuration	Zero-Touch Provisioning (via NetLiNQ), CLI
SAFETY AND ENVIRONMENTAL COMPLIANCE	
FCC Title 47 CFR Part 15, Subpart B	Yes
FCC Part 96 Base Station	Yes
UL 62368-1 Safety	Yes
CBRS OnGo Alliance	Yes
ETSI 301 908-14	Yes
ETSI 301 908-1	Yes
ETSI 301 489-50	Yes
ETSI 300 019-1-3	Yes
MECHANICAL	
Dimensions (L x W x D)	20.6" x 10.4" x 5.2" (525 x 266 x 133 mm)
Weight	22 lbs (10 kg)
Operational Temperature	-40 °F to 140 °F (-40 °C to 60 °C)
Rating	IP67



Contact Us

Tel: +1-800-301-4962
info@blinqnetworks.com
www.blinqnetworks.com

140 Renfrew Drive, Markham
ON, L3R 6B3, Canada
© 2025 BLiNQ Networks