



PCW-400

Outdoor Small Cell

Where 5G
Meets Wi-Fi



Outdoor Integrated Enterprise 5G & Wi-Fi Small Cell

The PCW-400 Wi-Fi enabled 5G outdoor Small Cell is extremely versatile and purpose-built for AI-powered enterprise and smart city deployments. It can be effortlessly implemented into a variety of edge computing scenarios, supporting real-time AI intelligence, computer vision applications, and smart traffic or environment monitoring systems.

Operating as a fully integrated small cell, the PCW-400 delivers unprecedented data capacity and enhanced user Quality of Experience (QoE), ensuring low-latency, high-throughput connectivity critical for AI and machine learning workloads at the edge.

This 5G NR small cell supports bands* n48, n77, and n78, along with three Wi-Fi 7 bands, enabling up to 128 concurrent users. Its dual 5G and Wi-Fi design ensures frequency redundancy and interference mitigation, making it ideal for 5G coverage extension, Neutral Host Networks, and Private Network deployments.

The PCW-400 can be easily mounted on lamp posts or building facades to provide 180° coverage. It can also be deployed in a back-to-back configuration for full 360° coverage—enabling scalable, AI-driven infrastructure across dense urban and industrial environments.

Administered by BLiNQ's NetLiNQ Management Suite, the PCW-400 can interface with any third-party SMO (Service Management & Orchestration) based on standard O1 (O-RAN) management interfaces.

For CBRS band networks, the PCW-400 implements both n48 connectivity options - a stand-alone CBSD agent, as well as connectivity to a SAS PROXY embedded in the NetLiNQ SON Controller.

**Other bands available by request*



**Single Product SKU covering
Frequency Range 3.3 - 4.2 GHz**



**5G NR 4T4R Cell,
200 MHz OBW/IBW**



**Max. Throughput: 6 Gbps
Of Aggregated 5G & Wi-Fi**



2T2R Triband, Wi-Fi 7 AP



**Zero-Touch Provisioning
(Automatic Onboarding)**

PCW-400

Overview




Additional Ordering Options:

- **5G NR Only (No Wi-Fi)**
PC-400
- **Premium Connectivity:** 200 MHz OBW & 128 UEs
PC400i-35-PLUS

Supported Features & Benefits:

- **5G bands n48, n77 and n78**
This covers 3550–3700 MHz (CBRS), 3300–4200 MHz and 3300–3800 MHz respectively.
- **180° Coverage**
Install 2 units back-to-back for a 360° coverage
- **Integrated Antenna**
Hassle-free, simple deployment
- **Carrier Aggregation**
Up to 4 CC
- **All 5G FR1 TDD Configurations**
- **VoNR**
- **GPS, 1588v2 and SyncE**
- **Mobility**
- **Mounting Bracket** included in Unit Package

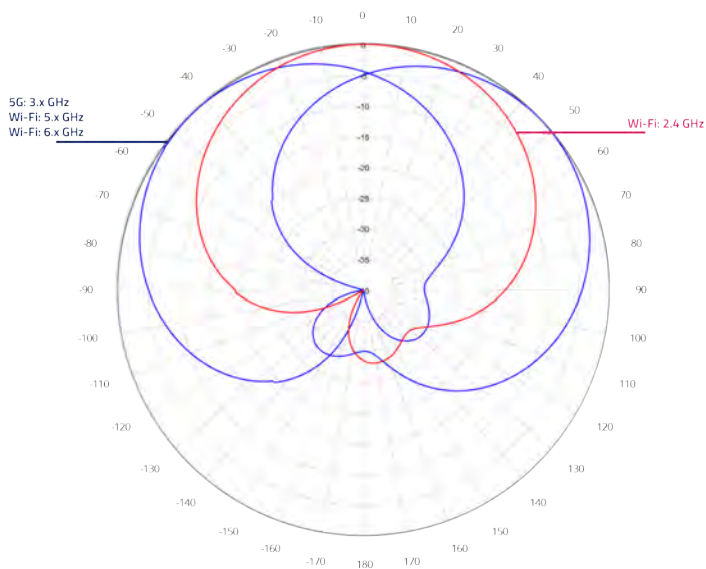

PCW-400

Specifications



RADIO SPECIFICATIONS	
3GPP Compliance	3GPP Rel. 16
5G Frequency Bands	3.3–4.2 GHz (n48/n77/n78)
5G RF	4T4R (180 deg. coverage)
5G Max. Tx Power Per Port / Aggregate (2x2)	23 / 26 dBm
5G Antenna Peak Gain	14 dBi
5G IBW/OBW	200/100 MHz (200/200 MHz Optional)
5G Channel BW	10, 20, 30, 40, 60, 80, 100 MHz
Wi-Fi Standard / Frequency Bands	Wi-Fi 7 (802.11be) / 2.4 GHz, 5.x GHz, 6.x GHz
Wi-Fi 5.x and 6.x GHz RF	Two 2x2 90° Beams (180° Coverage)
Wi-Fi 2.4 GHz RF	2x2 90° Beam (90° Coverage)
Wi-Fi Max. Tx Power Per Port / Aggregate (2x2)	23 / 26 dBm
Wi-Fi Antenna Peak Gain	10 dBi (For all Bands)
Wi-Fi Channel BW	Up to 320 MHz
Wi-Fi Mesh	Easy Mesh, Multi-Link
PERFORMANCE & ATTRIBUTES	
No. of UEs Supported	Up to 64 (128 Optional)
5G NR Radio Standard Support / Quality of Service	5G NR / 3GPP Compliance
5G NR Duplex Mode	TDD
Frame Structure	DDDSUUDDDD (5ms), DDSSUUDDDD, DDDSUUUDD (5ms), DDDSU (2.5ms)
5G Number of Component Carriers (CC)	Up to 4CC
Max. Modulation	DL: 256 QAM / UL: 256 QAM
Aggregated Throughput	Wi-Fi: 4 Gbps 5G NR: 2.4 Gbps
Power Consumption	70 W
Synchronization	GPS, 1588v2 and SyncE
5G Citizens Broadband Radio Service (CBRS)	CBSD Cat. B
Wi-Fi Automated Frequency Coordination (AFC) Support	Standard Power

PCW-400

Specifications



ELECTRICAL & INTERFACES	
Physical Interfaces	10G Ethernet with PoE++ & 10G SFP+
Power	PoE++ (IEEE 802.3bt)
SOFTWARE	
Management Protocols	NETCONF, WebSocket, REST/HTTPS, TR-069 (Customer Driven)
Networking	IPv4, IPv6, IPsec, WireGuard, VLANs, MOCN
Core Connectivity	5G Standalone (SA)
Wi-Fi Security	WPA3-Enterprise, Passpoint/Hotspot 2.0
Encryption	AES, CCMP, TKIP
Configuration	Zero-Touch Provisioning (via NetLiNQ), CLI
REGULATORY, SAFETY AND ENVIRONMENTAL COMPLIANCE*	
FCC Part 15C	Yes
FCC Part 15E	Yes
FCC Part 27	Yes
FCC Part 96	Yes
RED 2014/53/EU	Yes
ROHS 3 & REACH Directives	Yes
IEC 62368-1 SAFETY	Yes
ISED RSS-198	Yes
ISED RSS-247, 248	Yes
CBRS OnGo Alliance	Yes
Wi-Fi Alliance	Yes
MECHANICAL	
Dimensions (L x W x D)	20.6" x 10.4" x 5.2" (525 x 266 x 133 mm)
Weight	22 lbs (10 kg)
Operational Temperature	-40 °F to 140 °F (-40 °C to 60 °C)
Rating	IP67

*Network Operators are responsible to adjust and set radio power (and EIRP) to meet country and local regulatory limits.



Contact Us

Tel: +1-800-301-4962
info@blinqnetworks.com
www.blinqnetworks.com

140 Renfrew Drive, Markham
ON, L3R 6B3, Canada
© 2025 BLiNQ Networks